




Swivel Stop Orientation

The spacing of the pedestal is set up so that the pedestal is installed with mounting holes forward and aft at 12:00 and 6:00 and the swivel stop bolt at about 4:30. When the slide is installed, the slide handle and the swivel lock handle are on the right side, and the tension knob faces left rear.

Slide Orientation – View from the rear. The small gap left of the bolt is 45 degrees and allows counterclockwise rotation of only 45 degrees before the stop bolt is hit. Clockwise rotation is allowed up to 255 degrees.

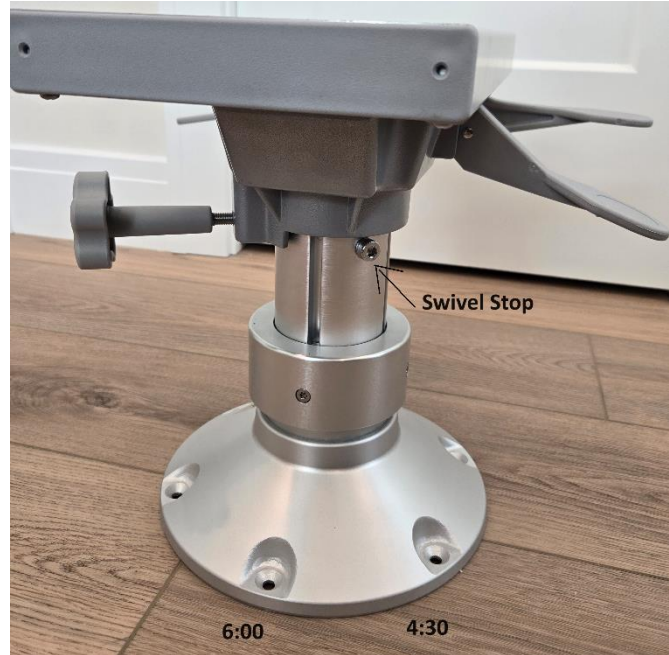

Hole Pattern –

The 6-hole pattern has holes at 12 o'clock and 6 o'clock, with the others at 2, 4, 8, and 10.



Note: The location of the warning label is of no consequence.

Swivel Orientation – Handles are towards the front of the slide.